

FES(DC) RANGE

HEAVY DUTY DIE CAST IP65 BODY



FEATURES

- IP65 rated
- IK10 Vandal resistant body
- Die cast aluminium body finished in grey and opal polycarbonate diffuser as standard
- Digital or analogue dimming option available
- Emergency versions available
- Variety of mounting options
- 2 hood options – FES(DC)10X only
- Up to 110 Llm/tcW


The FES(DC) is the ideal luminaire for car parks and canopies where a high lumen output is required. The body is die cast in aluminium with an opal polycarbonate diffuser, sealed to IP65 which makes this luminaire suitable for external areas.

The fitting comes with a fixed surface mounting bracket as standard but is also available with a selection of mounting accessories – an adjustable bracket for wall mounting, a mounting arm adapter to fit onto a post, and a curved mounting arm with wall bracket. These accessories make the FES(DC) suitable for internal and external car parks as well as under canopies. The high lumen output means that this fitting would also work well for illuminating sports areas.


The FES(DC)101 is also available with a horizontal or vertical hood for reduced light pollution making it a great choice for use as perimeter lighting.

DIMENSIONS

FES(DC)101

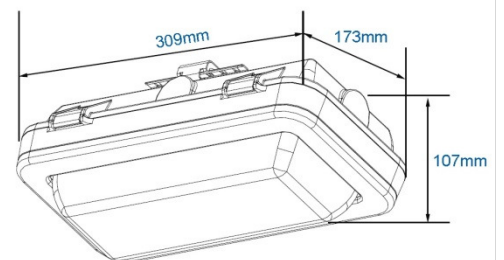

FES(DC)201

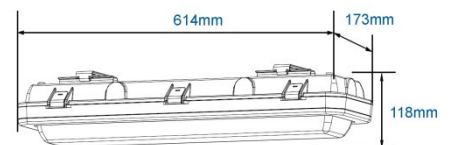

FES(DC)401



LUMINAIRE CAT NO	NOMINAL SIZE MM	WEIGHT KG	POWER (tcW)	LUMEN OUTPUT*	DIM OPT	EM OPT
FES(DC)101	309 x 173	2.0	26.4	2,828	°	°
FES(DC)102	309 x 173	2.0	43.3	4,750	°	°
FES(DC)201	614 x 173	2.5	57.8	5,695	°	°
FES(DC)202	614 x 173	2.5	77.3	8,021	°	°
FES(DC)401	1,223 x 154	4.0	126	13,172	°	°
FES(DC)402	1,223 x 154	4.0	152	15,930	°	°

*Lumen output of the luminaire – based on 4,000k LED diodes

ADDITIONAL ORDERING INFORMATION

- DALI dimming - add /DALI
- Emergency version - add /EM
- Adjustable Bracket - add /AB
- Mounting arm adapter - add /PMA
- Curved mounting arm - add /CMA
- Vertical Hood –FES(DC)10X only - add /VHD
- Horizontal Hood –FES(DC)10X only - add /HHD

- LED Colours:
- Cool White (4,000k) - add /CLCW