


# HJT RANGE

## STAND ALONE RECESSED EMERGENCY KIT

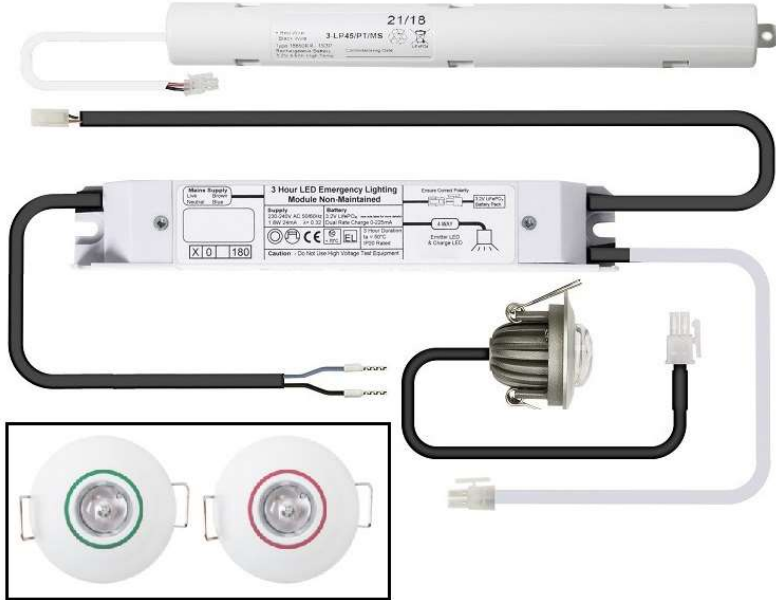

This standalone LED emergency kit is energy saving, low maintenance and the plug and play connectors makes installation on site simple. The kit is designed to fit up into the ceiling void through the 43mm cut-out.

The HJT is manufactured for use with constant current LED's and is available as a 3-hour non-maintained pack and is supplied complete with inverter, battery pack and LED head.

They range of LED heads has been designed with 3 optic options – 110°, corridor and open area. They are IP20 rated as standard but can be upgraded to IP54. The heads are supplied with a white bezel as standard; black is also available and incorporate a bi-colour (green and red) halo LED indicator.

| LUMINAIRE<br>CAT NO. | OPTIC     | LUMEN<br>OUTPUT | WEIGHT<br>KG |
|----------------------|-----------|-----------------|--------------|
| HJT/1C/110           | 110°      | 186             | 0.61         |
| HJT/1C/OA            | OPEN AREA | 224             | 0.61         |
| HJT/1C/CO            | CORRIDOR  | 232             | 0.61         |
| HJT/3C(HO)/110       | 110°      | 237             | 0.71         |
| HJT/3C(HO)/OA        | OPEN AREA | 268             | 0.71         |
| HJT/3C(HO)/CO        | CORRIDOR  | 266             | 0.71         |

### ADDITIONAL ORDERING INFORMATION

- Self-test (NM version only) - add /EMST
- DALI self-test - add /EM-DA
- IP54 Optic head - add /IP54

#### Bezel finish

- White as standard
- Black - add /B

### FEATURES

- 3 hour non-maintained kit
- Plug and play connectors
- 110°, Corridor and open area optics
- Self-test and DALI self-test versions available
- Simple installation
- LiFePO long life battery
- Standard and High output versions
- IP20 as standard, IP54 LED head also available

### DIMENSIONS

