


LCM RANGE

LED SURFACE, SUSPENDED OR RECESSED MODULAR OR CONTINUOUS SYSTEM

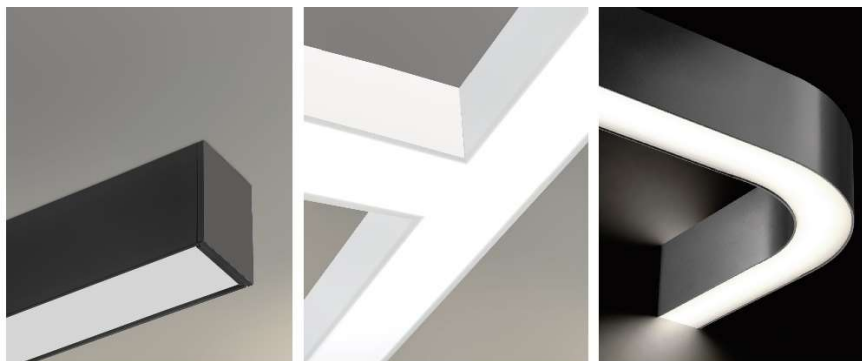

The LCM is manufactured from high grade extruded aluminium in modular – 850, 1250, 1,550 & 2,530mm lengths or as a continuous length / geometric arrangement. It comes as standard with a flat panel opal PMMA diffuser. A low glare Micro Prism diffuser is also available.

The LCM can be supplied with DALI dimmable drivers (DSI dimming versions are also available) with integral emergency options, and the choice of being either surface mounted, recessed or suspended (wire suspensions as standard although rods are available). Combined with the choice of lengths and output options, this flexibility makes the LCM ideal for reception areas, offices, retail and public buildings.

All versions come supplied as white (RAL9010) as standard with the option to finish in any other RAL colour on request.

LUMINAIRE CAT NO.	NOMINAL SIZE MM	LUMEN OUTPUT*	POWER (tcW)	WEIGH KGS	DIM	EM
LCM090(HE)	850	1,223	12.9	2.5	•	•
LCM090	850	1,804	17.5	2.5	•	•
LCM090(HO)	850	2,851	28.8	2.5	•	•
LCM120(HE)	1,260	1,835	17.6	3.5	•	•
LCM120	1,260	2,706	25.2	3.5	•	•
LCM120(HO)	1,260	4,276	41.9	3.5	•	•
LCM150(HE)	1,550	2,243	21.1	4.3	•	•
LCM150	1,550	3,307	31.4	4.3	•	•
LCM150(HO)	1,550	5,226	50.1	4.3	•	•
LCM250(HE)†	2,530	3,670	35.2	7.3	•	•
LCM250†	2,530	5,411	50.4	7.3	•	•
LCM250(HO)†	2,530	8,553	83.8	7.3	•	•
LCM(CON)	**	2,255	21.0	2.8	•	•

*The lumen output of the luminaire based on 4,000K LED diodes with opal diffuser

** Typical values / meter

† Not available in /rec version

ADDITIONAL ORDERING INFORMATION

- | | | | |
|----------------------|----------------|---------------------|---------------|
| • DALI Dimming | - add /DALI | LED Colours; | |
| • DSI Dimming | - add /DSI | Warm white (3,000k) | - add /CLWW |
| • Emergency version | - add /EM | Cool white (4,000k) | - add /CLCW |
| • DALI Emergency | - add /DALI-EM | Body Colours: | |
| • Recessed with trim | - add /REC | White (RAL 9010) | - as standard |
| • Surface Mounted | - add /SUR | Black | - add /B |
| • Wire Suspension | - add /DSW | Silver Grey | - add /SG |
| • Rod Suspension | - add /DSR | Anodised Aluminium | - add /AL |
| • Opal diffuser | - add /OP | | |
| • Prismatic diffuser | - add /PP | | |

FEATURES

- Opal PMMA flat panel diffuser as standard.
- Low glare micro-prismatic diffuser option.
- Integral emergency and self-test conversions.
- DALI and DSI dimming available
- CRI 80 – CRI 90 available on request
- 3,000k or 4,000k colour option – tuneable white available on request.
- Surface, suspended or recessed.
- Modular, continuous or geometric arrangements available.
- 90° Radiused sections available
- White (RAL9010) as standard - other RAL colours available on request.

DIMENSIONS

